

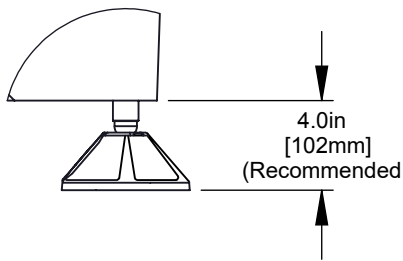
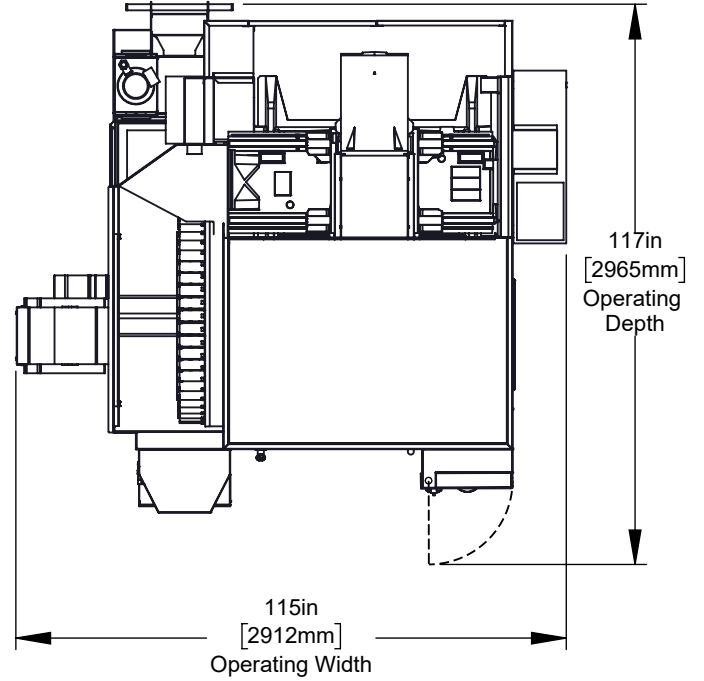
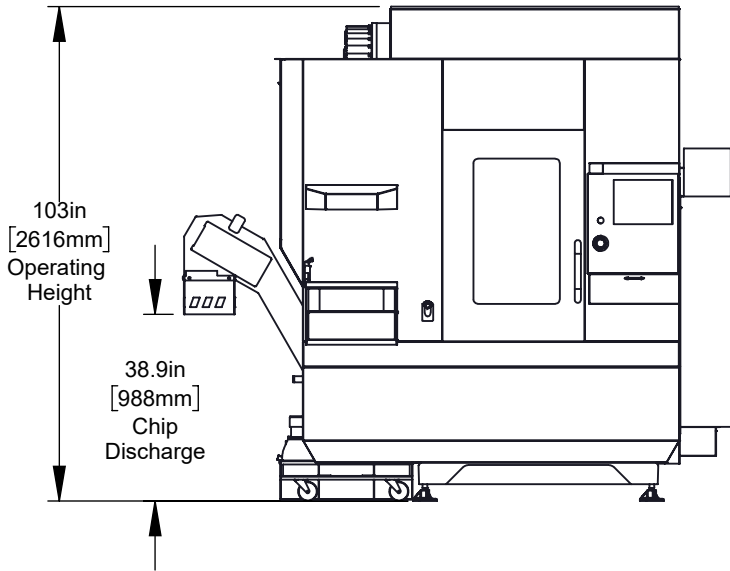


**Operating Dimensions**

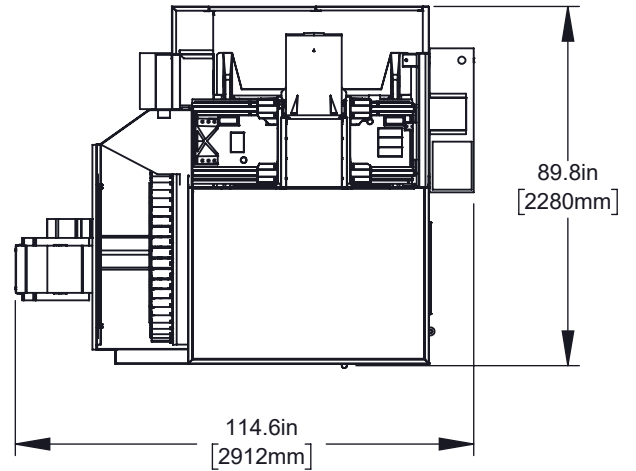


**As Shipped**

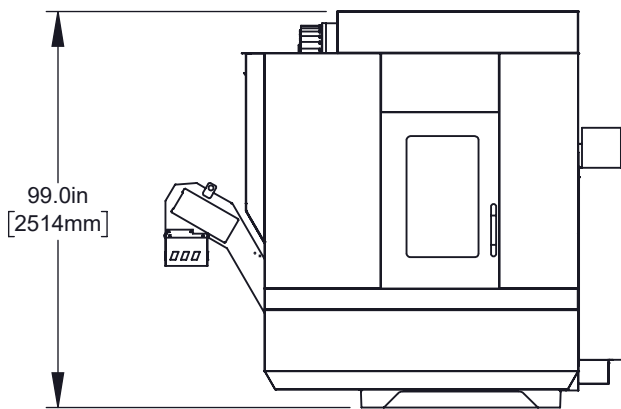

All dimensions based on stackup of sheetmetal, subject to variation of 1/2" ( 13 mm)

\*Due to continual product improvements, machine dimensions are subject to change without notice.

Air & Power

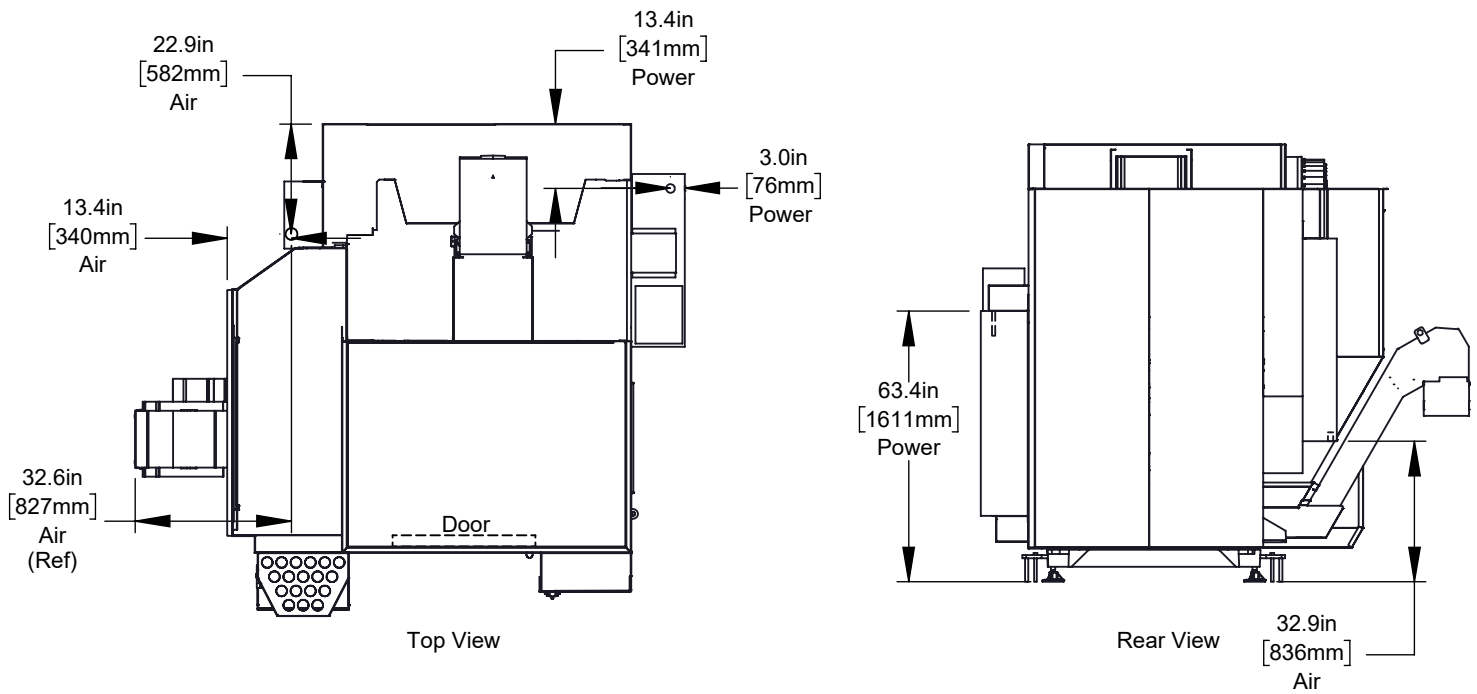


All dimensions based on stackup of sheetmetal, subject to variation of 1/2" ( 13 mm)

**Anchor Hole Detail**


Ø 5/8in [15.9mm]  
▽ 2.0in [50mm]-  
2.5in [66mm]

Anchor Pattern


Machine must be placed on a single, continuous concrete slab  
Slab must extend 12" [305mm] beyond anchor holes in all directions

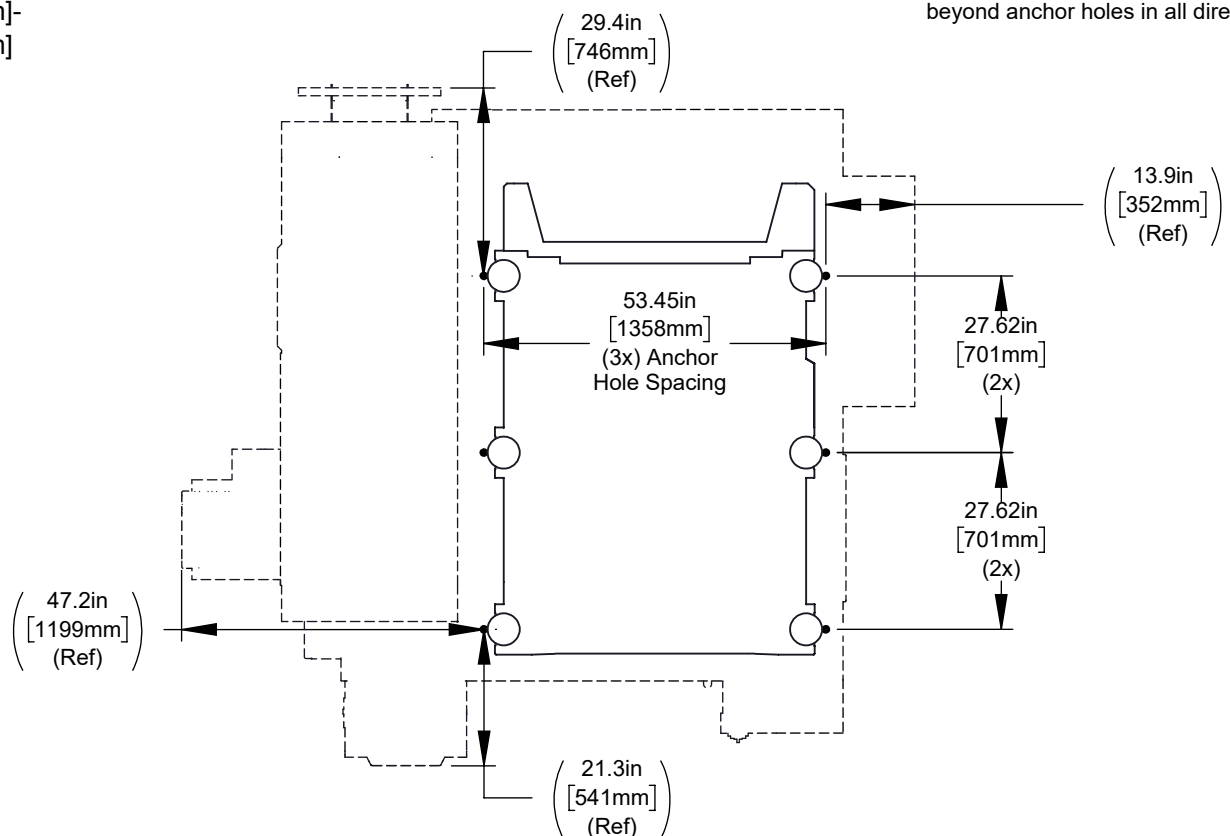

\*Due to continual product improvements, machine dimensions are subject to change without notice.

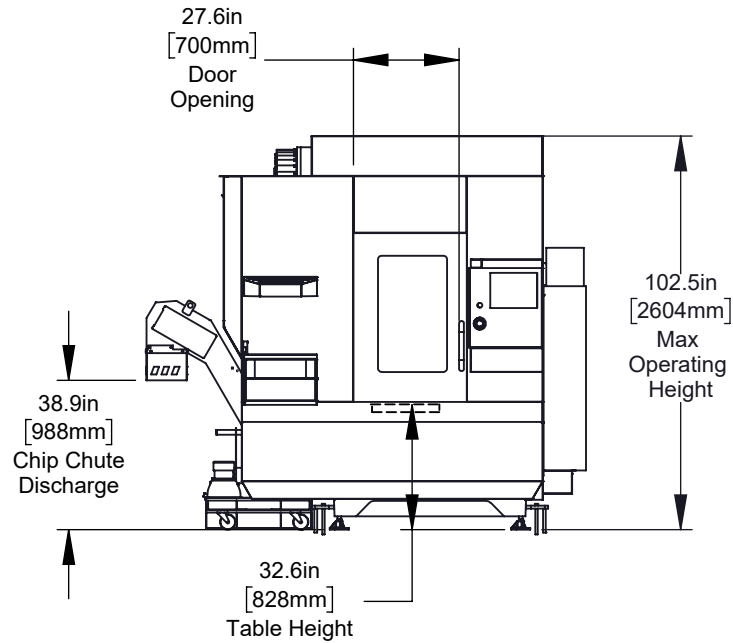Height Breakdown


All dimensions based on stackup of sheetmetal, subject to variation of 1/2" ( 13 mm)

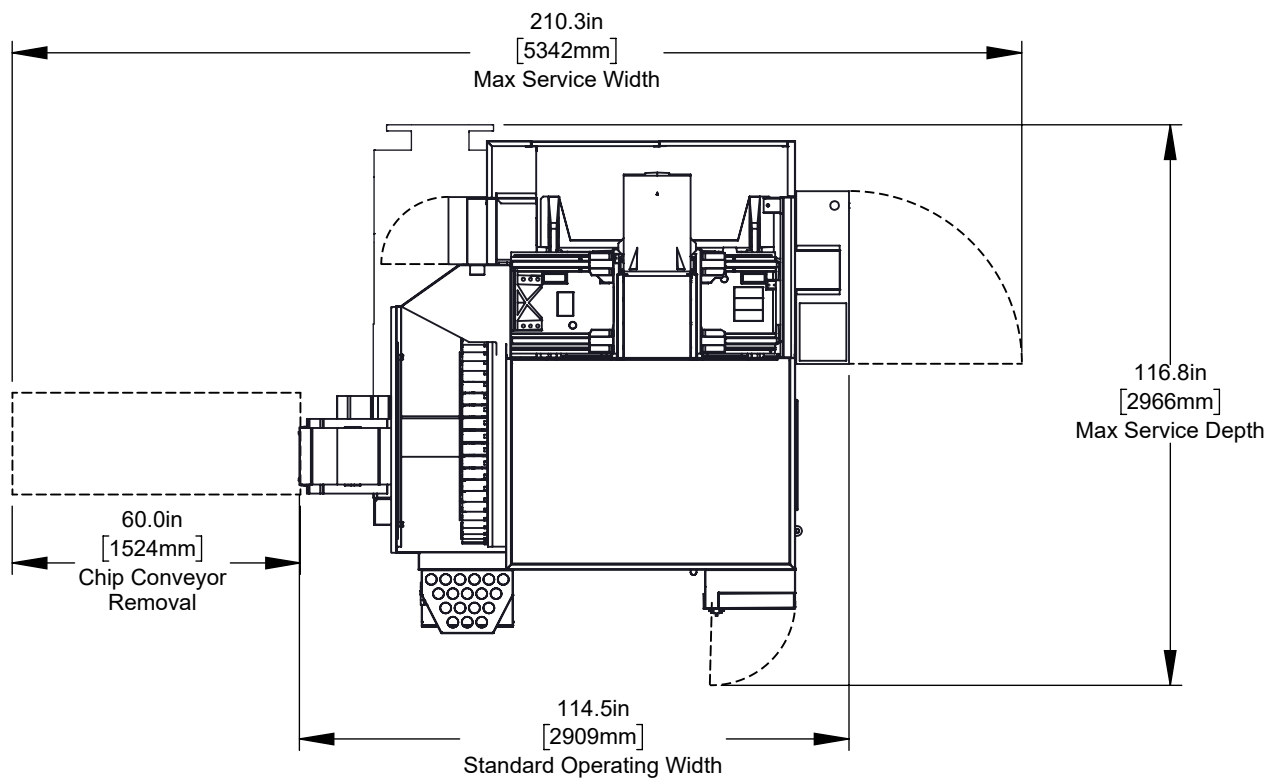Width Breakdown


All dimensions based on stackup of sheetmetal, subject to variation of 1/2" ( 13 mm)

\*Due to continual product improvements, machine dimensions are subject to change without notice.

Table

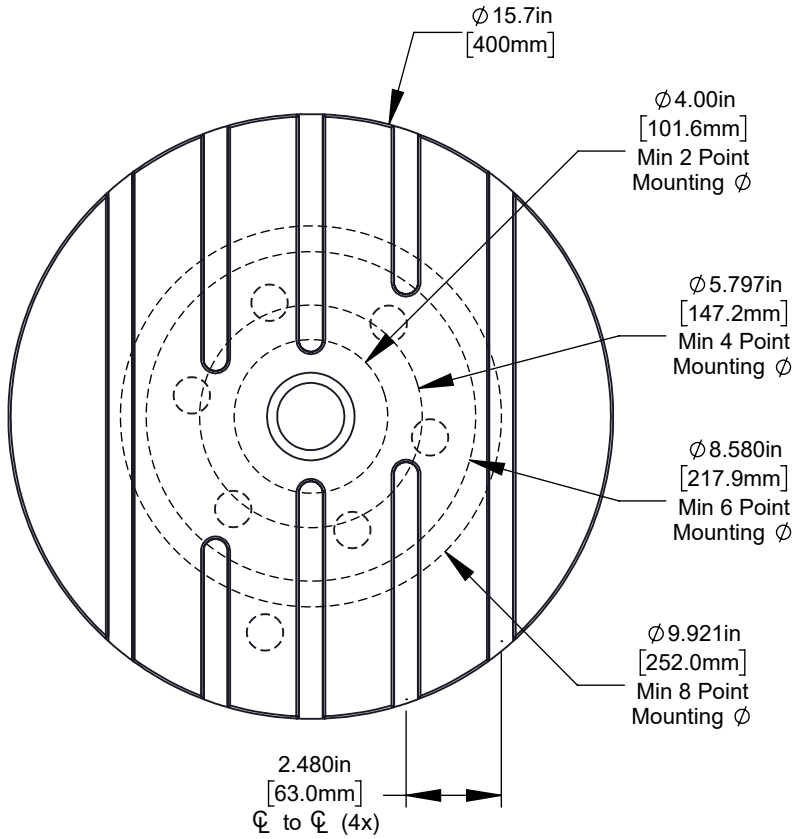


T-Slot Detail

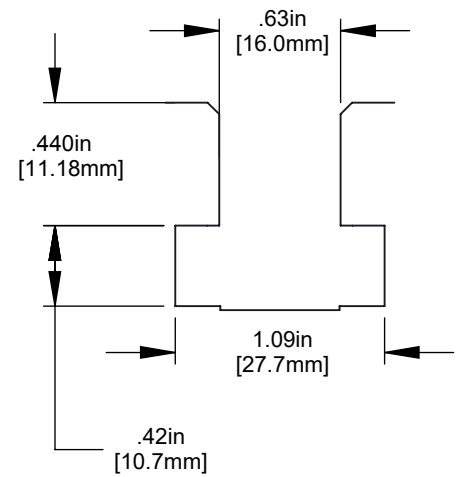


(7x) Phantom holes are not available to use for part fixturing

Tool Changer

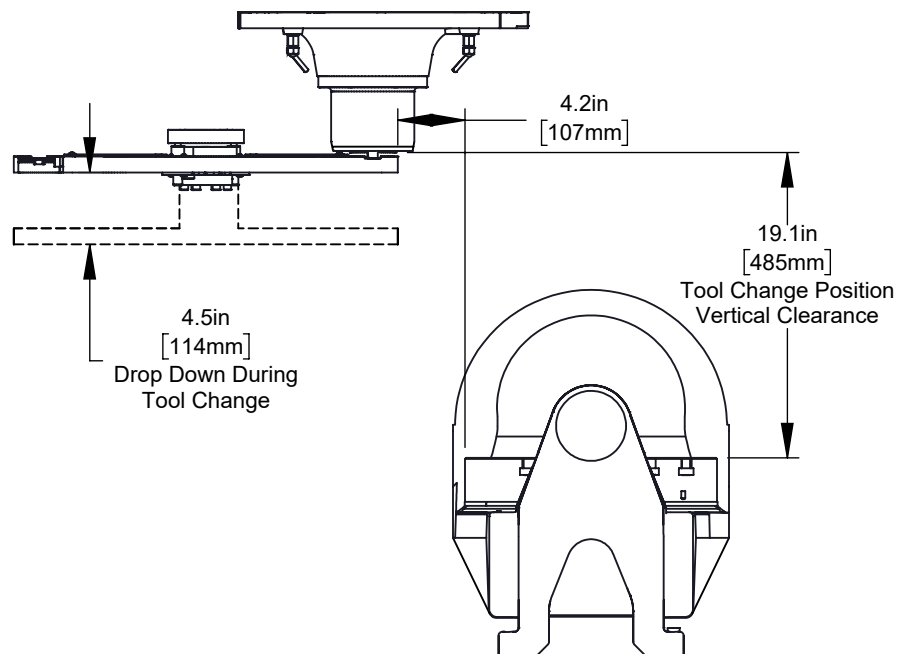

X&Y-Axis Clearance

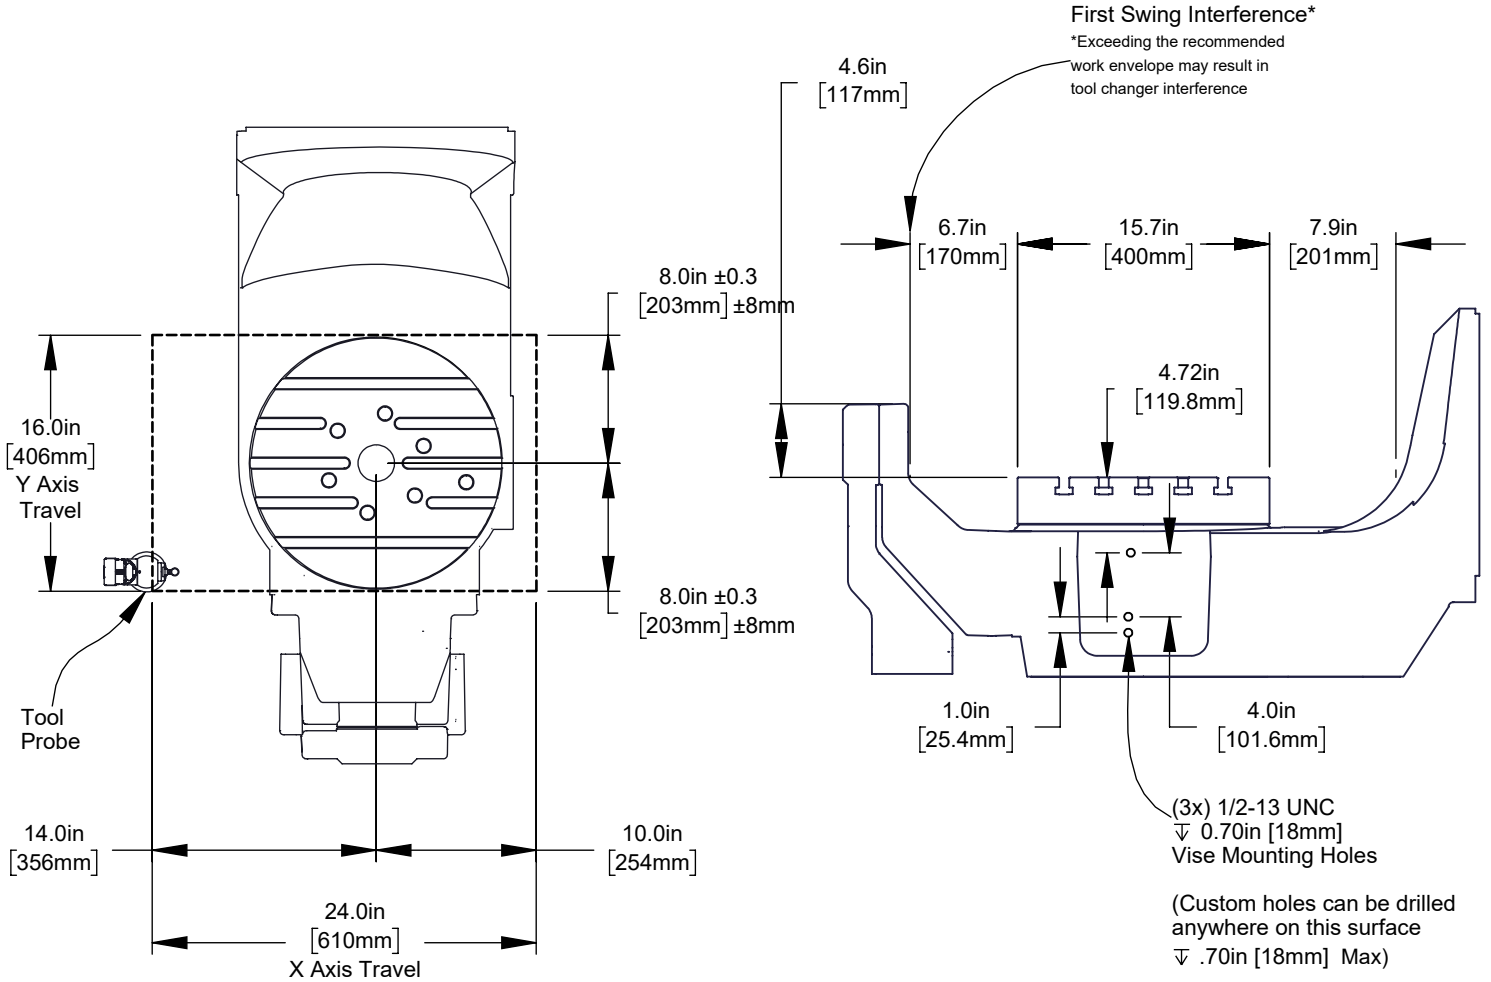

Z Axis Clearance at B0



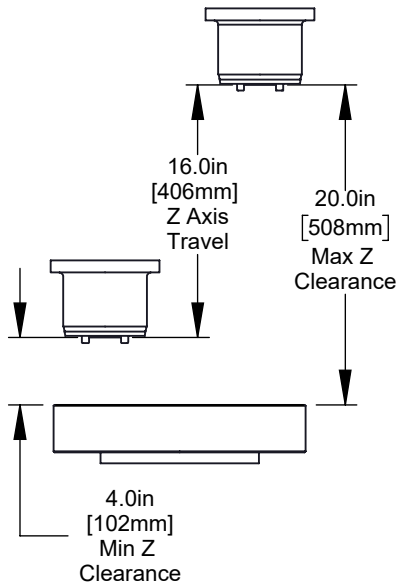


Table Rotation

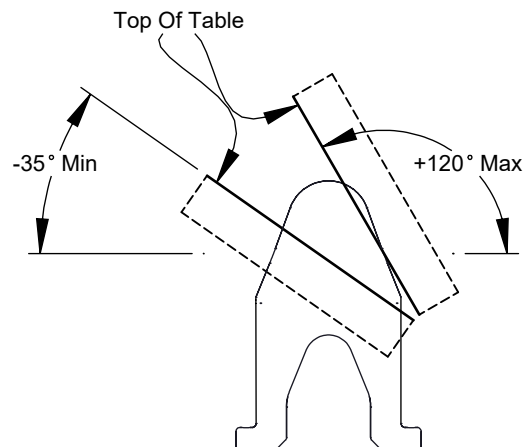

\*Due to continual product improvements, machine dimensions are subject to change without notice.

Clearance at B90

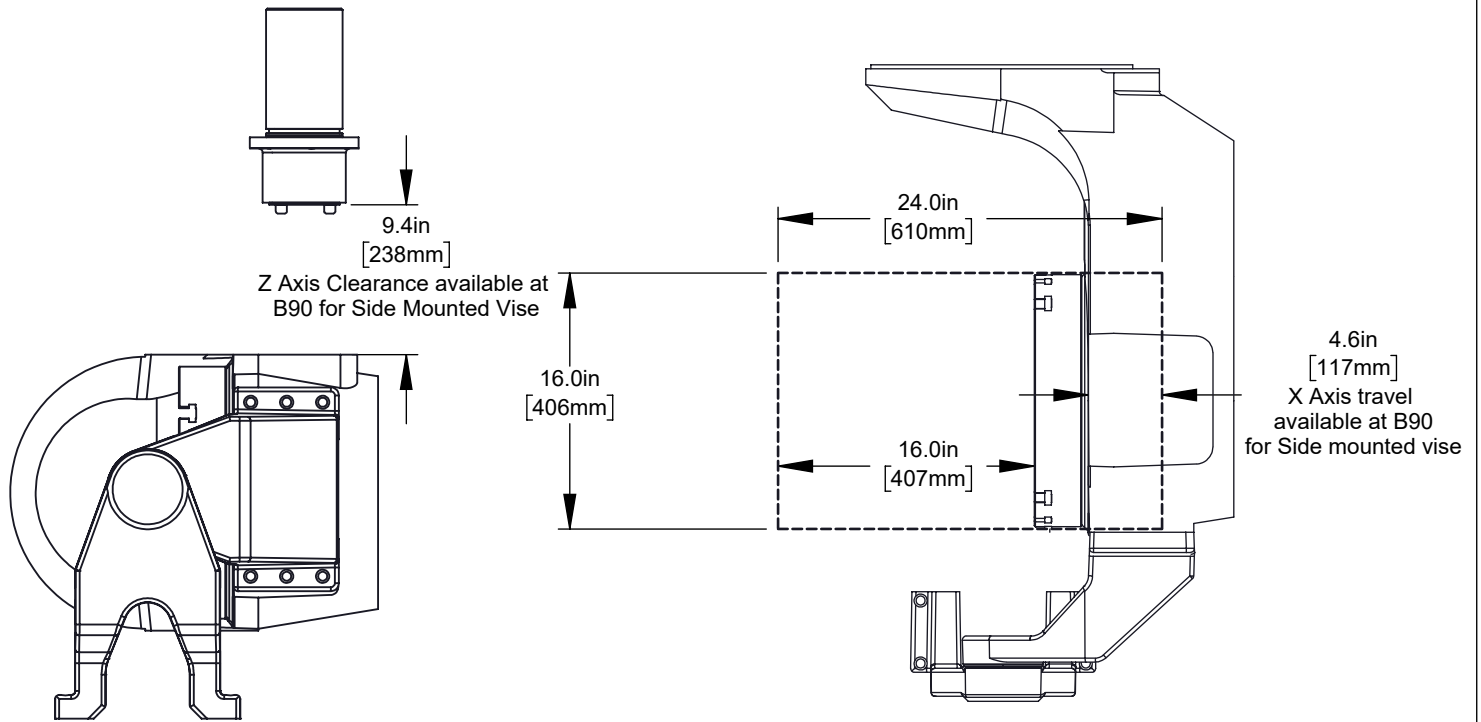

Work Envelope

